

# UL2468


## Flat Ribbon Cable 排线

### ■ 产品描述

- 额定温度: 80°C
- 额定电压: 300V
- 导体: 单支或绞合 30~16AWG 镀锡或裸铜
- 绝缘: 聚氯乙烯 (PVC)
- 阻燃等级: VW-1及CSAFT1、FT2
- 参考标准: UL758 UL1581 UL2556
- 适用范围:
- 用于一般电子、电器设备内部连接线

### ■ PRODUCT DESCRIPTION

- Rate temperature: 80°C
- Rate voltage: 300V
- Conductor: 30~16AWG (Solid or stranded, tinned or bare copper)
- Insulation: PVC
- Flame test: VW-1&CSAFT1、FT2
- Reference standard: UL758 UL1581 UL2556
- Application: For internal wiring of electronic and electrical equipment

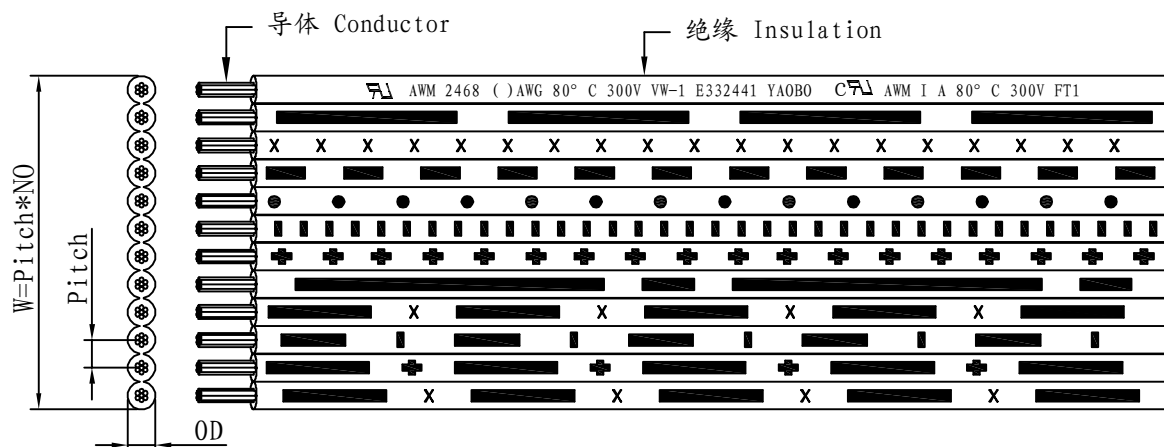

### ■ 印字 MARKING

AWM 2468 ( )AWG 80° C 300V VW-1 E332441 YAobo cUL AWM I A 80° C 300V FT1

### ■ 产品结构 CABLE CONSTRUCTION



导体 CONDUCTOR		绝缘 INSULATION		最大导体电阻 MAX. COND. RESISTANCE (Ω/km, 20°C, DC)	标准长度 STANDARD PUT-UP			
规格 AWG	间距 Pitch (mm)	构造 CONSTRUCTION (No./mm)	外径 DIA. (mm)		芯数 (No)	厚度 THICKNESS (mm)	外径 OD*W (mm)	英制 Ft/Ro11
28	1.3	7/0.127	0.39	0.45	2	1.30*2.60	2000	610
					3	1.30*3.90	1000	305
					4	1.30*4.20	1000	305
					5	1.30*7.50	1000	305
					6	1.30*7.80	1000	305
					7	1.30*9.10	1000	305
					8	1.30*10.40	1000	305
					9	1.30*11.70	1000	305
					10	1.30*13.0	1000	305
					11	1.30*14.30	1000	305
					12	1.30*15.60	1000	305

26	1.5	7/0.16	0.49	2	0.46	1.40*3.0	148.94	1000	305
				3		1.40*4.50		1000	305
				4		1.40*6.0		1000	305
				5		1.40*7.50		1000	305
				6		1.40*9.0		1000	305
				7		1.40*10.50		1000	305
				8		1.40*12.0		1000	305
				9		1.40*13.50		1000	305
				10		1.40*15.0		1000	305
				11		1.40*16.50		1000	305
				12		1.40*18.0		1000	305
				24		1.5		11/0.16	0.61
3	1.50*4.50	1000	305						
4	1.50*6.00	1000	305						
5	1.50*7.50	1000	305						
6	1.50*9.0	1000	305						
7	1.50*10.50	1000	305						
8	1.50*12.0	1000	305						
9	1.50*13.50	1000	305						
10	1.50*15.00	1000	305						
11	1.50*16.50	1000	305						
12	1.50*18.00	1000	305						
22	1.7	17/0.16	0.76		2		0.47		
				3	1.70*5.10	1000		305	
				4	1.70*6.80	1000		305	
				5	1.70*8.50	1000		305	
				6	1.70*10.20	1000		305	
				7	1.70*11.90	1000		305	
				8	1.70*13.60	1000		305	
				9	1.70*15.30	1000		305	
				10	1.70*17.00	1000		305	
				11	1.70*18.70	1000		305	
				12	1.70*20.40	1000		305	