

UL2651


Flat Ribbon Cable 排线

■ 产品描述

- 额定温度: 105° C
- 额定电压: 300V
- 导体: 单支或绞合 36~14AWG 镀锡或裸铜
- 绝缘: 聚氯乙烯 (PVC)
- 阻燃等级: VW-1及CSAFT1、FT2
- 参考标准: UL758 UL1581 UL2556
- 适用范围:
- 用于一般电子、电器设备内部连接线

■ PRODUCT DESCRIPTION

- Rate temperature: 105° C
- Rate voltage: 300V
- Conductor: 36~14AWG (Solid or stranded, tinned or bare copper)
- Insulation: PVC
- Flame test: VW-1&CSAFT1、FT2
- Reference standard: UL758 UL1581 UL2556
- Application: For internal wiring of electronic and electrical equipment

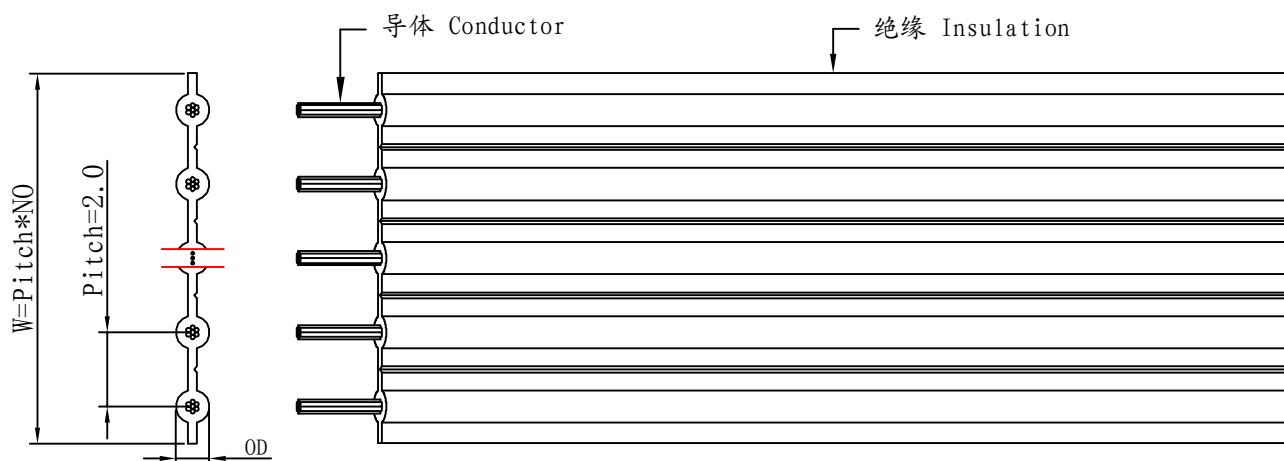

■ 印字 MARKING

AWM 2651 () AWG 105° C 300V VW-1 E332441 YAobo cUL AWM I A 105° C 300V FT1

■ 产品结构 CABLE CONSTRUCTION



导体 CONDUCTOR		绝缘 INSULATION		最大导体电阻 MAX. COND. RESISTANCE (Ω/km, 20°C, DC)	标准长度 STANDARD PUT-UP				
规格 AWG	间距 Pitch (mm)	构造 CONSTRUCTION (No. /mm)	外径 DIA. (mm)		芯数 (No)	厚度 THICKNESS (mm)	外径 OD (mm)	英制 Ft/Ro11	公制 M/Ro11
28	2.0	7/0.127	0.30	2-64	0.26	0.90	237.25	250	76.2
26	2.0	7/0.16	0.49	2-64	0.26	1.0	148.94	250	76.2
24	2.0	11/0.16	0.61	2-50	0.30	1.20	93.25	250	76.2
22	2.0	17/0.16	0.76	2-30	0.30	1.36	55.0	250	76.2
20	2.0	21/0.178	0.94	2-20	0.33	1.60	34.6	250	76.2